


HMS-6.2KW

Hybrid Solar Inverter

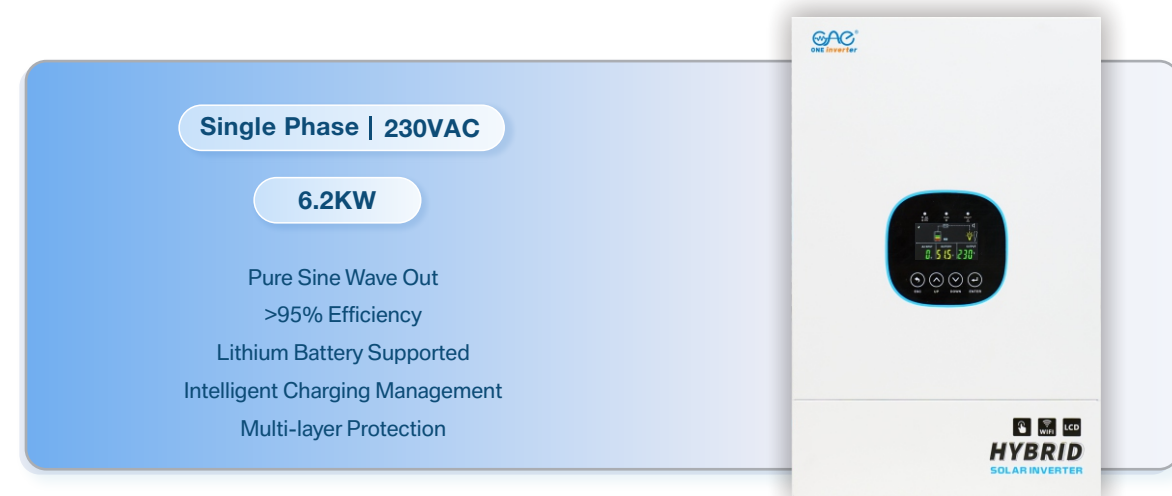


The HMS Series is a professional hybrid solar inverter charger for backup, off-grid, and energy storage systems. It features pure sine wave output (6.2KW rated, 12.4KW surge power), $\leq 10\text{ms}$ transfer time, supports up to 6 parallel units, and includes a hybrid charger (up to 120A) compatible with lead-acid and lithium batteries.

FEATURES

- Rated power 6.2KW.
- Pure sine wave AC output.
- Parallel operation supported.
- With BMS / COMM communication.
- Wi-Fi remote monitoring (optional).
- Grid-powered only, battery-free operation.
- System will go to bypass and cut off charging if an error happens under utility grid mode.

PARALLEL & THREE-PHASE OPERATION UP TO 6 UNITS

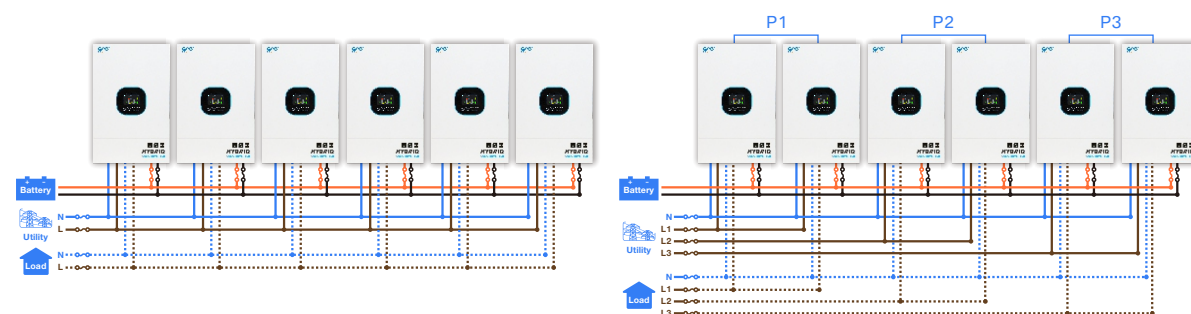

Parallel Operation in Single phase

Support 3-phase equipment

MODEL	HMS - 48622M120
Rated Power	6.2KW
Input Voltage Waveform	Sinusoidal (utility or generator)
Nominal Input Voltage	230Vac
Low Loss Voltage	170Vac $\pm 7\text{V}$ (UPS); 90Vac $\pm 7\text{V}$ (Appliances)
Low Loss Return Voltage	180Vac $\pm 7\text{V}$ (UPS); 100Vac $\pm 7\text{V}$ (Appliances)
High Loss Voltage	280Vac $\pm 7\text{V}$
High Loss Return Voltage	270Vac $\pm 7\text{V}$
Max AC Input Voltage	300Vac
Max AC Input Current	50A
Nominal Input Frequency	50Hz / 60Hz (Auto detection)
Low Loss Frequency	40 $\pm 1\text{Hz}$
Low Loss Return Frequency	42 $\pm 1\text{Hz}$
High Loss Frequency	65 $\pm 1\text{Hz}$
High Loss Return Frequency	63 $\pm 1\text{Hz}$
Output Short Circuit Protection	Line mode: Circuit Breaker Battery mode: Electronic Circuits
Efficiency (Line Mode)	>95%(Rated R load, battery full charged)
Transfer Time	10ms typical (UPS); 20ms typical (Appliances)
Output power de-rating: For 6.2KW models, when AC input voltage under 170V the output power will be de-rated.	
Output Voltage Waveform	Pure Sine Wave
Output Voltage Regulation	230Vac $\pm 5\%$
Output Frequency	60Hz or 50Hz
Peak Efficiency	93%
Overload Protection	100ms $\geq 205\%$ load; 3s $\geq 150\%$ load; 5s $\geq 110\%$ ~150%load
Surge Capacity	2*rated power for 5 seconds
High DC Cut-off Voltage	66Vdc
Low DC Cut-off Voltage	44Vdc
Nominal DC Input Voltage	48Vdc
Cold Start Voltage	46.0Vdc
Low DC Warning Voltage	46.0Vdc
0 load<20%	42.8Vdc
@ 20% $\leq$ load <50%	40.4Vdc
Low DC Warning Return Voltage	48.0Vdc
@ load <20%	44.8Vdc
@ 20% $\leq$ load<50%	42.4Vdc
Low DC Cut-off Voltage	44.0Vdc
@ load<20%	40.8Vdc
@ 20% $\leq$ load<50%	38.4Vdc
High DC Recovery Voltage	64Vdc
High DC Cut-off Voltage	66Vdc
DC Voltage Accuracy	$\pm 0.3\text{V}$ @ no load
THDV	<5% for linear load,<10% for non-linear load @ nominal voltage
DC Offset	$\leq 100\text{mV}$
Charging Current (UPS)	80A
Bulk Charging Voltage	Flooded Battery 58.4Vdc
	AGM / Gel Battery 56.4Vdc
Floating Charging Voltage	54Vdc
Overcharge Protection	66Vdc
Charging Algorithm	3-Step
Charging Curve	

Solar Input	6.2KW
MODEL	7000W
Rated Power	500Vdc
Max. PV Array Open Circuit Voltage	90Vdc~450Vdc
PV Array MPPT Voltage Range	27Ax1
Max.Input Current	120Vdc $\pm 5\text{Vdc}$
Start-up Voltage	120A
Maximum Charging Current	
Power Limitation	

MODEL	6.2KW
Safety Certification	CE
Operating Temperature Range	-10 $^{\circ}\text{C}$ to40 $^{\circ}\text{C}$
Storage temperature	-15 $^{\circ}\text{C}$ ~60 $^{\circ}\text{C}$
Humidity	5% to 95% Relative Humidity (Non-condensing)
Product Size(D*W*H)	528mm*325mm*131mm
Packing Size(D*W*H)	583mm*405mm*217mm
N.W.(Kg)	12.2KG
G.W.(Kg)	13.8KG
Max parallel numbers	6
Circulation Current under No Load Condition	Max 2A
Power Unbalance Ratio	<5% @ 100% Load
Parallel communication	CAN
Transfer time in parallel mode	Max 50ms
Parallel Kit	YES